

WALL MOUNTED Arch Solid Plastic Urinal Screens

Material Specification

1 . 0 1 Construction

Urinal screens shall be certified CLASS B polyethylene solid plastic. The material shall contain no foaming agents, which can cause the formation of air pockets. The self-lubricating surface is resistant to marking and can be maintained effectively with ordinary household cleaners. Material is ideal for toilet partition installations, especially in high abuse and high moisture environments.

1 . 0 2 Wall Mounted Screens


Urinal screens shall be 19mm (0.75") thick, with uniformly machined radius edges and gentle curves top and bottom. Screens must be 457mm (18") or 610mm (24") deep by 1105mm (43.5") high and anchored into the wall approximately 337mm (13.25") off the floor with two brackets spaced 749mm (29.5") apart.

1 . 0 3 Hardware & Fittings

Wall mounted urinal screens shall be fastened to the wall with two elliptical brackets. Brackets shall be Zamac 5 with #4 brushed nickel finish. Fasteners are theft-proof 6-lobe security head stainless steel screws (for connection to wall) and through-bolts (for connection to the screen).


1 . 0 4 Finish

Screens shall be constructed of certified CLASS B polyethylene solid plastic with uniform color throughout. Color shall be as selected from Hadrian's color card.



WALL MOUNTED Arch Solid Plastic Urinal Screens

Available panel depths
for Wall Mounted screens:
610mm (24")
457mm (18")

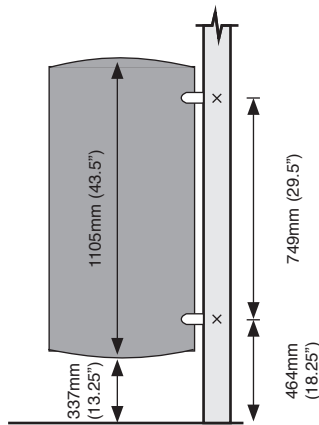

Wall Mounted Screen

Important Note:
Refer to final drawings for wood blocking information.
Wood blocking is critical to ensure a rigid installation.

